
Walkability Information

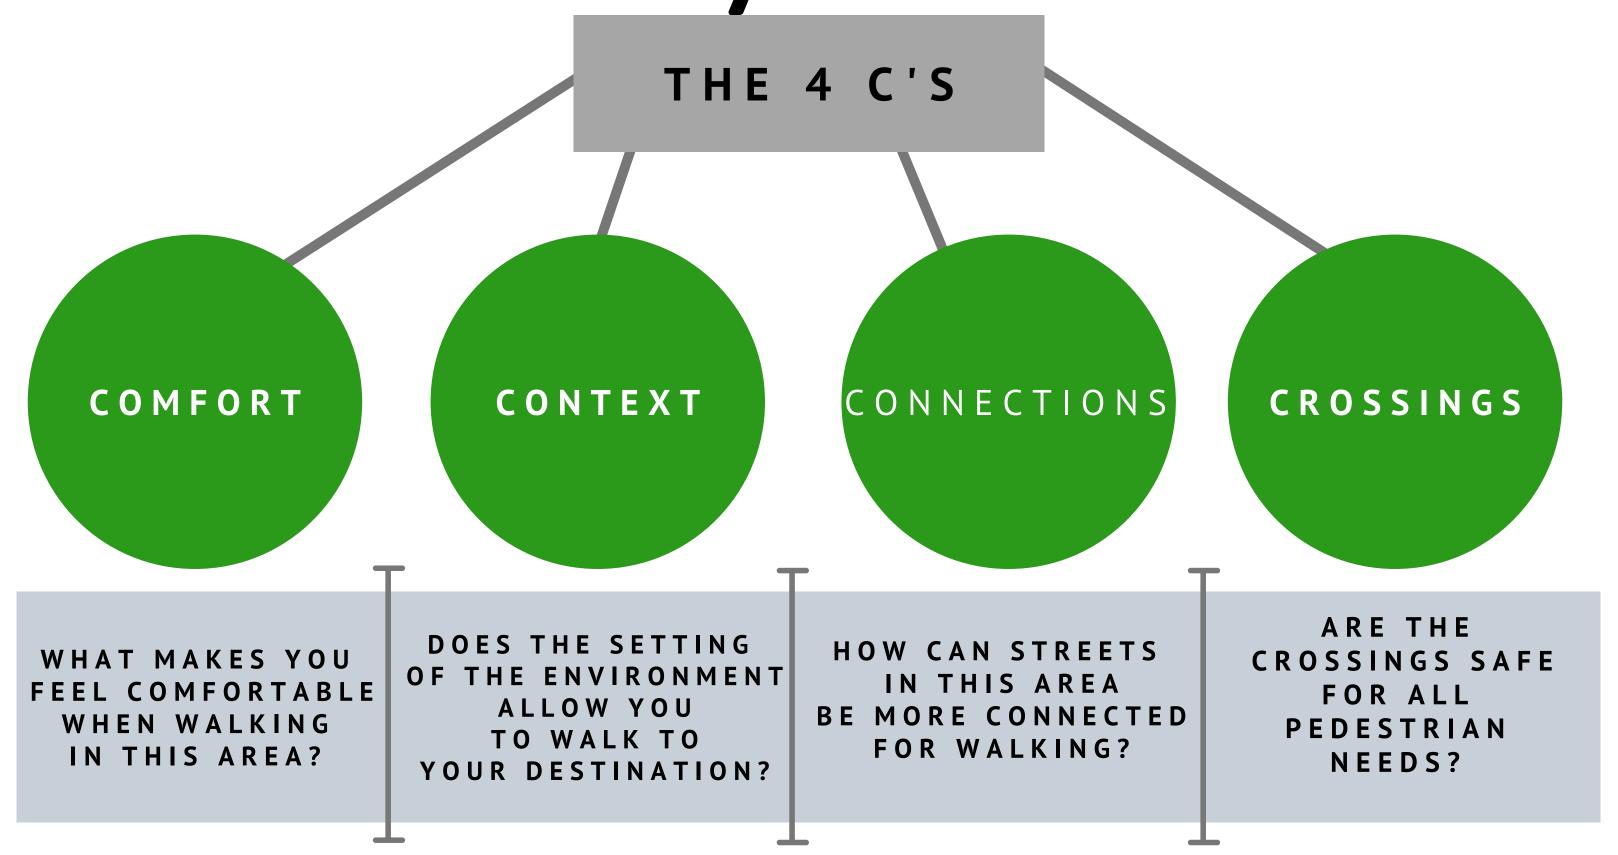

Key Measurements:

MIN. SIDEWALK WIDTH: 4 FT.; 5 FT. PREFERRED

MAX. CROSS SLOPE OF WALKING ROUTE: 2%

AVG. HUMAN WALKING SPEED: 3.5 FT./SEC FOR CROSSING

MIN. WIDTH OF SHARED USE PATH: 10 FT.

PUSH BUTTONS SHOULD BE ACCESSIBLE FROM FLAT LANDING APPROX. **42 IN. HIGH.**

FLAT LANDINGS SHOULD BE 4 FT. BY 4 FT.

MIN. HEIGHT OF THE BOTTOM OF SIGNS ABOVE PEDESTRIAN ACCESS ROUTE: 80 IN.



Wakabiity Checkist QUESTIONS ABOUT THE WALKING ROUTE

ON YOUR WALK • DID YOU HAVE A SIDEWALK/PA □ YES		HE WHOLE	TRIP?
• HOW MANY TIMES DID YOU HAN SIDEWALKS/PATH, DUE TO SOM	_		
• HOW MANY STREETS DID YOU C	ROSS?		
 WHO/WHAT HELPED YOU CROSS CROSSING GUARD STOP SIGN CROSSWALK TRAFFIC LIGHT OTHER 	THE BUS	SIEST STRE	ET?
PUT AN "X" IN EACH ROW TO	SHOW US	S HOW MAN	Y DRIVERS:
N O	DRIVERS S	OME DRIVERS	MANY DRIVERS
DROVE SLOWLY AND SAFELY			
WAITED FOR YOU TO CROSS THE STREET			
BLOCKED THE CROSSWALK			
SPED THROUGH INTERSECTIONS			



WHAT ELSE DID DRIVERS DO?